

DUAL BAND ANTENNA SYSTEM

DESCRIPTION

5 TECHNICAL FIELD

The invention refers to telecommunication apparatuses for wireless connections, specifically a system of antennas for transceiving signals on two frequency bands.

BACKGROUND ART

10 Terminals whose internal circuits and antennas are capable of operating in several bands, e.g. terminals capable of supporting the two GSM standards - GSM900 and GSM1800 - by using the 900 MHz and the 1800 MHz band respectively, have been developed over the past years, in the wake of the mass diffusion of mobile telephone systems.

15 These terminals - which include laptop computers, car fitted transceivers, etc., in addition to telephones - require antennas that are both very efficient, to provide connections even when the electromagnetic field is low, and which are not cumbersome, so as not to jeopardise portability.

20 Additionally, the need to transmit and/or receive large amounts of data, greater than that which currently supported by normal GSM systems, is increasingly more felt. This need can be satisfied by designing a terminal that can simultaneously receive and transmit on two frequency bands, e.g. two GSM bands, or on different channels in the same frequency band.

25 An antenna system characterised by minimum size, maximum efficiency and the possibility of operating in the same band or on different bands, while ensuring maximum band decoupling for transmitting and receiving at the same time, must be used to reach this objective.

The various antenna types known today include microstrip antennas, which are very thin and operate on two frequency bands. An example of dual band antenna is illustrated in the IEEE Trans. "On Antenna Propagation", May 1998, Vol. 46, No. 4, pp. 30 596-598, "A Compact PIFA Suitable for Dual Frequency 900/1800-MHz Operation". The article describes a PIFA (Planar Inverted F Antenna) in which a capacitive load is arranged in correspondence with the open end of the antenna and which consists of a metallic plane parallel to the ground plane. In this way, the resonant length is reduced by $\lambda/4$ to $\lambda/8$. Moreover, feed is capacitive; this is because the antenna is fed via an 35 auxiliary reed arranged between the ground plane and the antenna itself. The

capacitative load reduces the size of the antenna but also reduces the amplitude of the band, whereby complicating dual channel transmission in both of the two bands.

Another type of dual band antenna is described in IEE Electronics Letters, March. 1996, Vol. 32, No. 7, "Dual-band antenna for hand-held portable telephones". The antenna described in this article consists of two separate radiating elements, namely a rectangular element for the 1800 MHz band and an L-shaped element for the 900 MHz band. Two separate coaxial feeds are provided for the two elements; this arrangement increases independence of the two resonating frequencies of the structures but at the same time makes the antenna feed layout more complicated. The two elements are connected to ground via metallic pins located near the coaxial feeds. This configuration presents poor decoupling between the two feeds.

Wireless telecommunication devices employing several antennas include the device described in international patent application WO 0104994. This employs an antenna system, in which one antenna is used to receive GPS (Global Positioning System) signals, another is used for transceiving radiotelephone signals and a possible third antenna, operating on lower frequencies, is arranged between the other two, which also performs shielding functions. In this case, since all antennas are reciprocally different, they can operate simultaneously only on different bands where services of a different nature are provided.

BRIEF DESCRIPTION OF THE INVENTION

The antenna system for transceiving signals on two frequency bands according to the invention overcomes the aforesaid shortcomings and solves the technical problems described; the antenna system can simultaneously transmit and receive a variety of signals on one or two frequency bands of the same service, ensuring a high degree of decoupling between the two, being characterised by its small size and high efficiency.

Specifically, the invention refers to an antenna system for transceiving signals on two frequency bands as described in the preamble to claim 1.

An additional object of the invention is a multichannel mobile transceiving apparatus as described in the preamble to claim 11.

BRIEF DESCRIPTION OF THE FIGURES

Additional characteristics of the invention will now be described, by way of example only, with reference to the following description of a preferred form of embodiment and the accompanying drawings in which:

- Fig. 1 is a perspective view of an antenna;
- Fig. 2 is a cross-sectional view of an antenna;

- Fig. 3 is a perspective view of an antenna system;
- Fig. 4 is a Cartesian chart illustrating the reflection coefficient pattern on the single antenna input port, according to frequency;
- Fig. 5 is a Cartesian chart illustrating the decoupling pattern between the various antennas, according to frequency;
- Fig. 6 is a radiation chart of an antenna at a frequency of 0.92 GHz;
- Fig. 7 is a radiation chart of an antenna at a frequency of 1.80 GHz.

DESCRIPTION OF A PREFERRED EMBODIMENT

The antenna system according to the invention is a device consisting of microstrip antennas arranged on a single dielectric substrate, which is compact, and suitable for inserting in small containers. There are four antennas in the example below, but the system may comprise any number of antennas, both odd and even, from a minimum of two, thanks to good reciprocal decoupling that ensures that the reciprocal influence is very low.

Each antenna has a coaxial feed, which can be connected to a different transceiver or combiner of two or more antennas and is positioned to minimise coupling with other antennas in the system.

To ensure minimum thickness, each antenna is made of a microstrip. This is a planar technique, which is used to produce transmission lines or antennas employing strips or reeds of conductive metal deposited on one side of a dielectric substrate; a layer of metallic material is arranged on the other side to connect the line or antenna to ground. The shape and dimensions of the strip characterises the behaviour and performance of the microstrip antenna.

The substrate typically consists of a dielectric material strip the thickness of which is constant. In particular, the characteristics of the antenna - radiation chart, band, reflection coefficient, etc. - vary with the geometric or electrical characteristics of the substrate.

As known, microstrip antennas are typically resonant. A distinction can be made between various types of resonant structures according to the employed resonance mode.

The most common type is called $\lambda/2$ (where λ is the wavelength), because the antenna has a length equal to $\lambda/2$, where λ is related to the resonant frequency at which radiation occurs.

A second type of resonating structures are called quarter-waves because the length of one of the antennas is equal to $\lambda/4$, where λ is related to the resonant

frequency. This resonating mode is established in the presence of a $\lambda/4$ short-circuit to ground. There may be various resonating modes in an antenna, so that it can be used at several frequencies corresponding to these modes.

The four antennas used in this system are of the PIFA type, operating according to the described method. They represent a valid solution in terms of compactness and are capable of operating on two frequency bands, for example two GSM bands .

The single PIFA antenna, as shown in Fig. 1, consists of two radiating elements formed of metallic strips, one of which is rectangular and indicated by reference number 8, and the other is L-shaped and indicated by reference number 9. The two strips are arranged on a dielectric substrate 2, separated by a gap 10 and joined in the feed area 7.

A continuous strip 3 is arranged on the opposite side of the dielectric substrate with ground plane functions. Two short-circuits 4 and 5, arranged at the short end of the antenna on the edges of the substrate, connect the radiating elements to the ground plane. They make it possible to operate on two bands by establishing two $\lambda/4$ resonant modes. The first resonant mode is generated by strip 9, and the second is generated by the smaller strip 8.

As illustrated more clearly in Fig. 2, a coaxial wire 6 feed is used for each of the four antennas with equal characteristic impedance, for example 50 Ω . The external shielding of the coaxial wire is connected to the ground plane 3 and the inner core is connected to the antennas in point 7.

As mentioned, the system must present suitable radiation characteristics, specifically:

- reflection coefficient frequency behaviour at the feed port S_{11} capable of obtaining the best possible radiation efficiency in the required bands (i.e. in the 890-960 and 1710-1880 MHz ranges, in the case of the GSM 900 and 1800 bands);
- sufficient decoupling between the four PIFA antennas forming the system.

These characteristics can be obtained by optimising the physical dimensions of each antenna, the thickness of the dielectric layer, the ground plane dimensions and the arrangement of the antennas.

The dimensions given below are expressed in terms of wavelength λ_0 at a frequency of 900MHz (the midband frequency of the GSM 900 band). The antenna operating bands vary by varying λ_0 ; consequently system dimensions will be $\lambda_0/\lambda_1 \approx 2$

where λ_1 is the wavelength at the upper resonating frequency. The system can be made with a tolerance of $\pm 5\%$ on the quantities shown below.

As shown in Fig. 3, a system of antennas in the GSM900 and 1800 bands require the presence of the following parts:

- 5 - a electrical substrate 2, rectangular in shape, with relative dielectric constant 2.33 and thickness $h = 1.6$ mm; the dimensions of the substrate are $W=0.21\lambda_0$ and $L=0.42\lambda_0$;
- a conductive copper layer 3 on the lower side of the substrate, extended on the entire surface to form the ground of the antenna; any thickness in excess
- 10 of $10\text{ }\mu\text{m}$ is possible, e.g. one of the normally marketed sizes, $17\text{ }\mu\text{m}$ or $35\text{ }\mu\text{m}$;
- the four antennas 1A, 1B, 1C and 1D, located at the vertex of the upper side of the substrate and arranged to mirror the symmetry axes of the substrate. With this arrangement, the radiating elements operating on the lower band,
- 15 have a shielding effect between the elements operating on the upper band, consequently improving decoupling. The symmetric condition, however, may be respected only for one of the axes, especially if there is a greater number of antennas, e.g. 6. With reference to Fig. 1, the dimensions of each antenna are $L1=0.144\lambda_0$, $W1=0.0792\lambda_0$, $L2=0.0912\lambda_0$, $W2=0.0408\lambda_0$ and $G=0.0024\lambda_0$.
- 20 The distances between the antennas, shown in Fig. 3, are $D1=0.0276\lambda_0$ and $D2=0.132\lambda_0$, with a tolerance of up to $\pm 10\%$;
- two short-circuits 4, 5, thickness $S=0.0096\lambda_0$ (Fig. 2).

As mentioned, each antenna is fed by a coaxial wire 6 whose inner core is connected to the position defined by the dimensions $C1=0.0144\lambda_0$ (Fig. 1) and

25 $C2=0.0264\lambda_0$ (Fig. 2).

Fig. 4 shows the reflection coefficient pattern, i.e. the ratio S_{11} expressed in dB between the amplitude of the reflected signal and the amplitude of the signal at the input port of one of the four antennas according to frequency. The minimum values corresponding to the two frequency bands are wide enough to permit simultaneous

30 transmission and reception.

Fig. 5 shows the decoupling pattern between the various radiating elements that form the device. Parameter S_{21} , expressed in dB, indicates the amplitude of the signal received by the antenna 1B and the amplitude of the signal sent to the antenna 1A, which is fed.

Similarly, the parameter S_{31} relates to antenna 1C, and S_{41} relates to antenna 1D, while antenna 1A is always fed.

The results show that the decoupling between the various antennas in the system is better than -20dB throughout the band.

5 Finally, Fig. 6 shows the radiation chart of one of the antennas at a frequency of 920 MHz and Fig. 7 shows the radiation chart at a frequency of 1800 MHz. These frequencies correspond to the midband frequencies of the two GSM bands.

The previously illustrated antenna system can be used to advantage in a multichannel transceiving apparatus in which several transceivers operate on different frequency bands and/or on different channels in the same frequency band. The
10 antenna system, being planar and globally very small in size, makes the mobile transceiving apparatus very compact and easily transportable by an operator.

An example of a multichannel mobile transceiving apparatus is a mobile television filming station intended to be carried and operated by a single operator, e.g. a reporter
15 moving on the territory to document an event, such as a sports event, a crime, a natural event, etc.

A mobile television filming station made according to the invention may consist of the following elements:

- a camera, e.g. a video camera of the currently manufactured type capable of
20 generating an analogue video signal, e.g. in PAL format, or a signal already converted into digital form, e.g. DV or Webcam formats;

- a processing unit for encoding and compressing the video signal from the video camera, e.g. using MPEG standard, capable of splitting the encoded video signal into several data flows;

- 25 - several mobile telephone terminals, inserted, for example, in a public telephone network (e.g. GSM900/1800 network), for the remote transmission of data flows, each mobile terminal being provided with at least one transceiver;

- a planar multiple antenna, comprising a system of antennas made according to the previously illustrated specifications, in which each antenna is connected to a
30 corresponding transceiver.

Naturally, this description is an example only. Variants and changes may be implemented without departing from the scope of the present invention, as defined by the following claims.

CLAIMS

1. Antenna system for transceiving signals on two frequency bands, in which two or more microstrip antennas (1A, 1B, 1C, 1D) are arranged on a single dielectric substrate (2), provided with a ground plane (3), characterised by the fact that each of said antennas is capable of operating simultaneously on a lower frequency band (λ_0) and on a higher frequency band (λ_1), is provided with a single feed connection (6) and is positioned to ensure decoupling with the other antennas better than -20 dB in the same frequency band.
2. Antenna system according to claim 1, characterised by the fact that the antennas (1A, 1B, 1C and 1D) are arranged on the upper side of the dielectric substrate (2) and are reciprocally distanced by $0.0276\lambda_0$ (D1) and $0.132\lambda_0$ (D2), with a tolerance of $\pm 10\%$ on the indicated quantities.
3. Antenna system according to claim 1, characterised by the fact that the antennas (1A, 1B, 1C and 1D) are arranged to mirror either one or both of the symmetry axes of said rectangular substrate (2).
4. Antenna system according to claim 1, characterised by the fact that each antenna (1A, 1B, 1C and 1D) is of the PIFA type, equipped with a radiating element for each frequency band and two short-circuits (4, 5) which are arranged on the short side of the antenna on the edges of the dielectric substrate (2) and are connected to the radiating elements of the ground plane (3).
5. Antenna system according to claim 1, characterised by the fact that said dielectric substrate (2) has a dielectric constant equal to 2.33 and a thickness (H) equal to 1.6 mm, with dimensions equal to $0.21\lambda_0$ (W) for $0.42\lambda_0$ (L) and a tolerance of $\pm 5\%$ on the quantities shown.
6. Antenna system according to claim 1, characterised by the fact that said ground plane (3) is arranged on the lower side of the substrate (2), is extended on the entire surface and has a thickness of more than $10\text{ }\mu\text{m}$.
7. Antenna system according to claim 1, characterised by the fact that each of said antennas (1A, 1B, 1C, 1D) has dimensions equal to $0.144\lambda_0$ (L1), $0.0792\lambda_0$ (W1), $0.0912\lambda_0$ (L2), $0.0408\lambda_0$ (W2) and $0.0024\lambda_0$ (G), with a tolerance of $\pm 5\%$ on the quantities shown.
8. Antenna system according to claim 1, characterised by the fact that said short-circuits (4, 5) has a thickness equal to $0.0096\lambda_0$ (S), with a tolerance of $\pm 5\%$.

9. Antenna system according to claim 1, characterised by the fact that each antenna is fed in position $0.0144\lambda_0$ (C1) and $0.0264\lambda_0$ (C2), with a tolerance of $\pm 5\%$ on the quantities shown.

5 10. Antenna system according to claim 1, characterised by the fact that said upper frequency band has a wavelength at the resonating frequency (λ_1), which is approximately half of that (λ_0) of said lower frequency.

11. Multichannel mobile transceiving apparatus characterised by the fact that it comprises:

- 10
- Several transceivers capable of operating on different frequency bands and/or on different channels in the same frequency band;
 - a planar multiple antenna, comprising a system of antennas made according to any of the previous claims, in which each antenna is connected to a corresponding transceiver of said transceiving apparatus.

15 12. Apparatus according to claim 11, in which said transceivers operate in the GSM900 and GSM1800 bands.

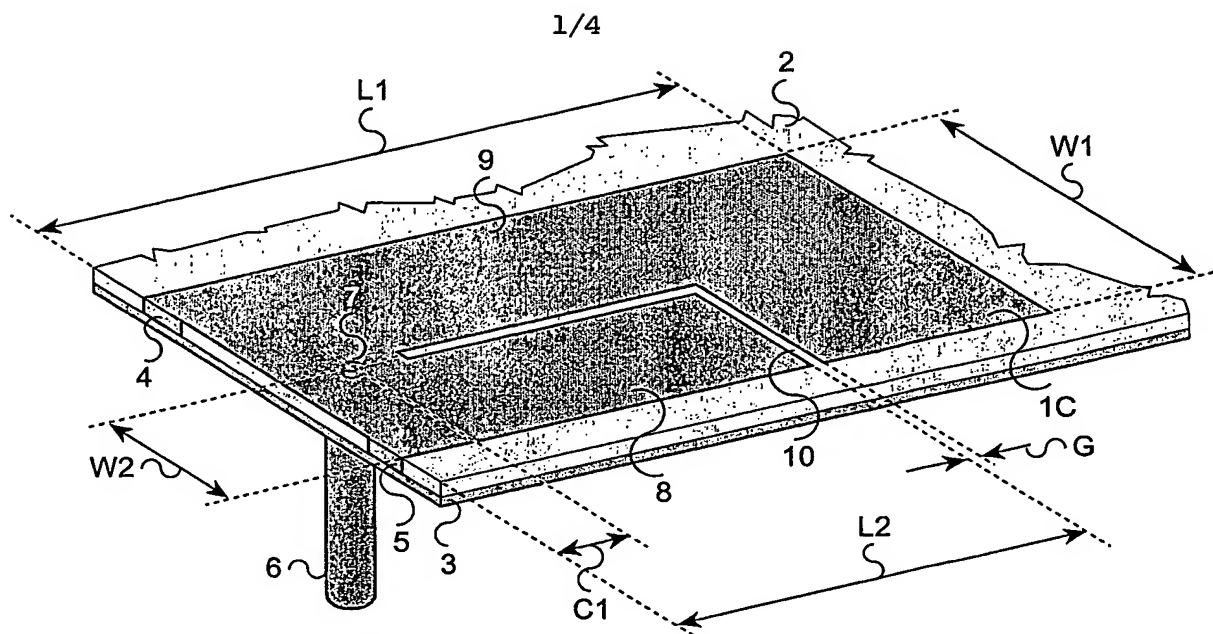


Fig. 1

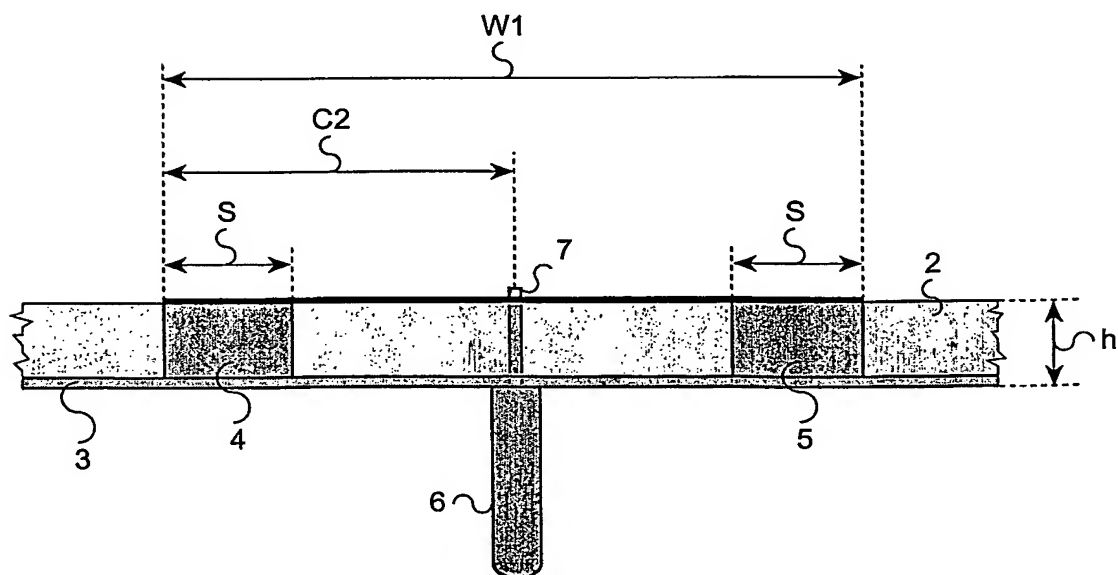


Fig. 2

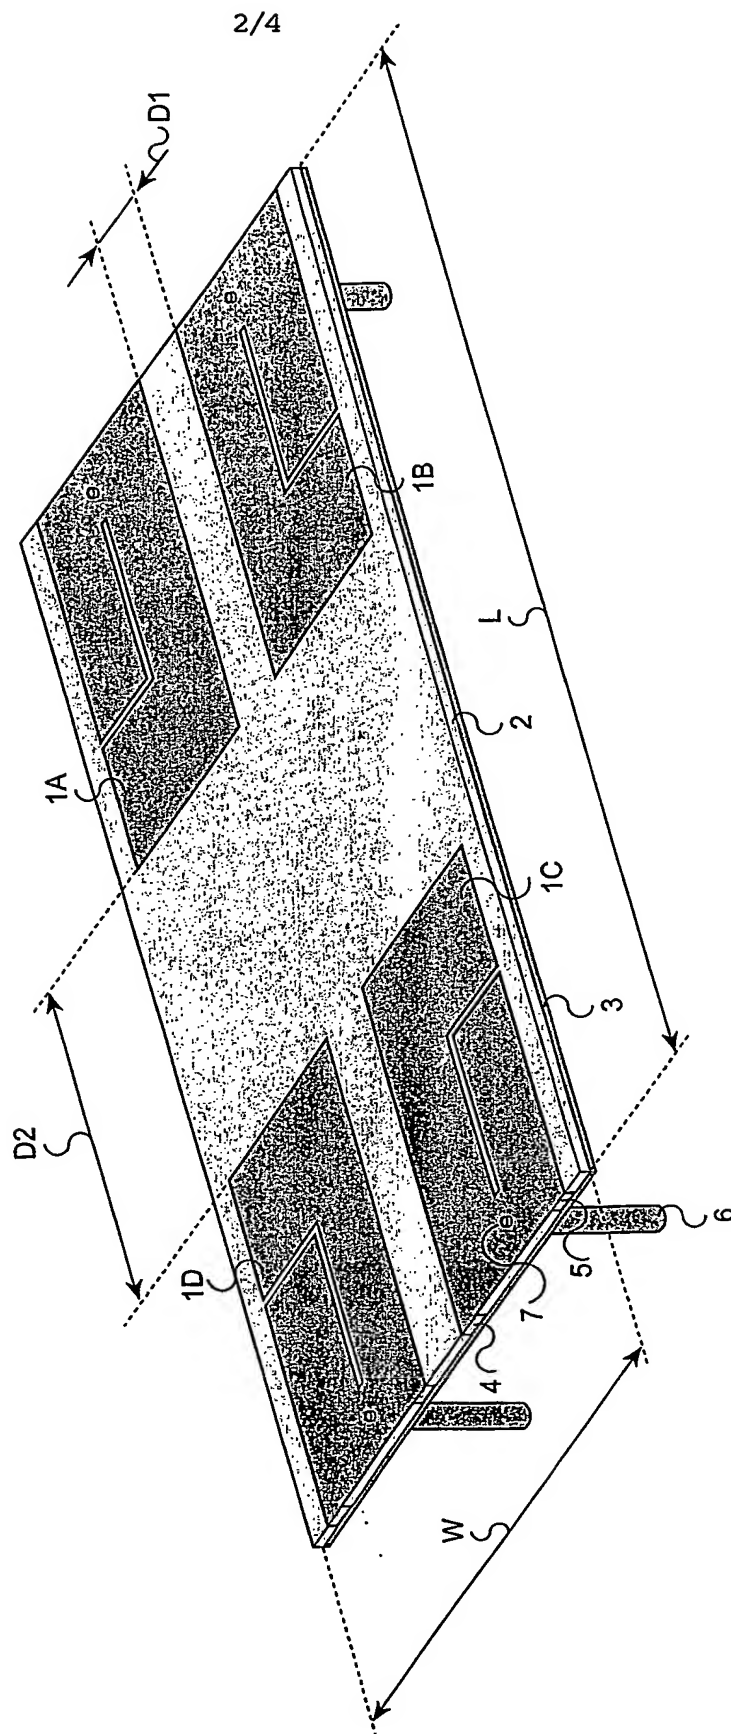


Fig. 3

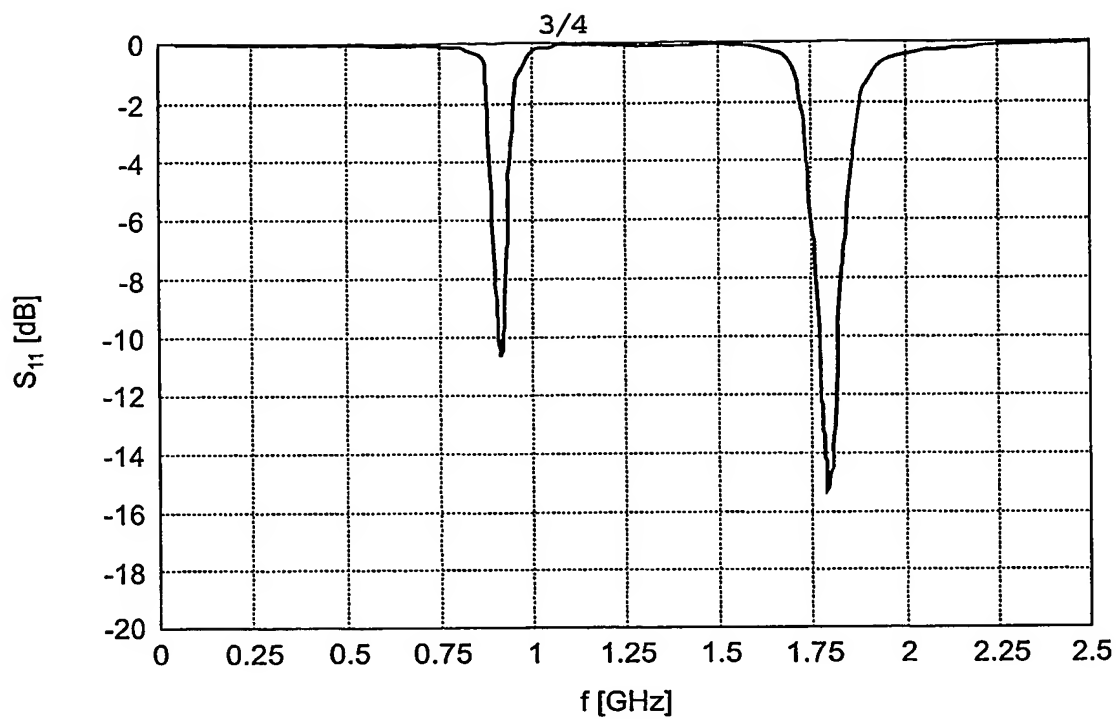


Fig. 4

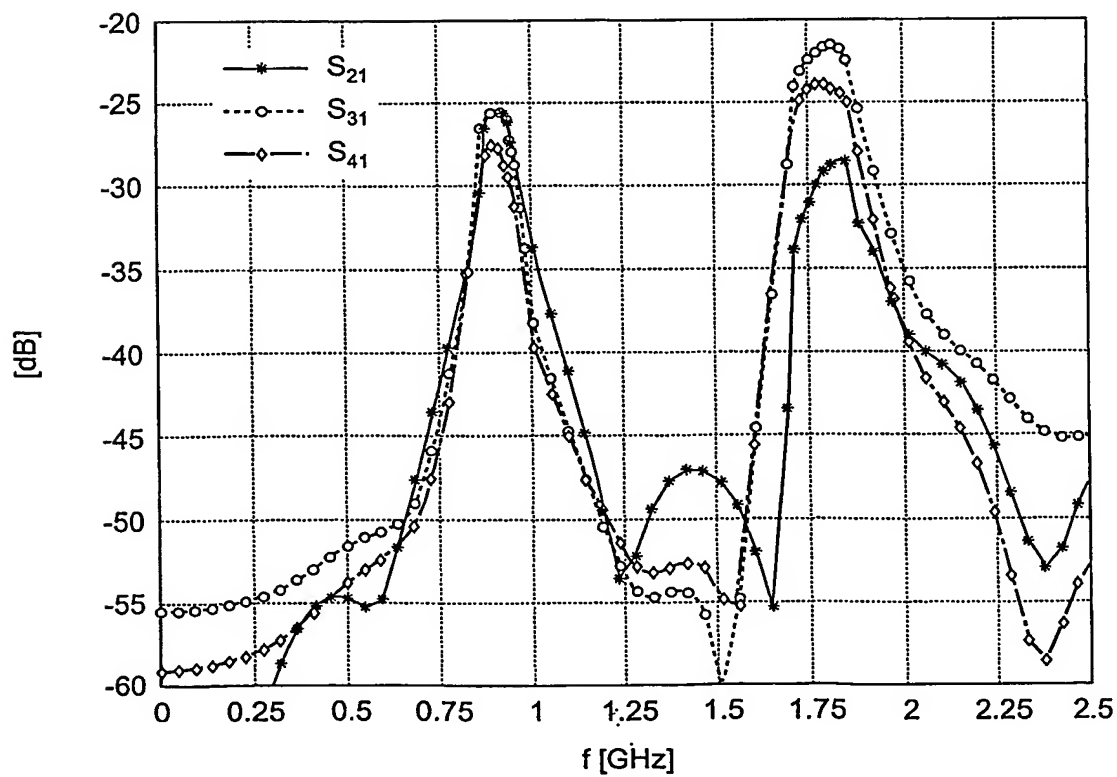


Fig. 5

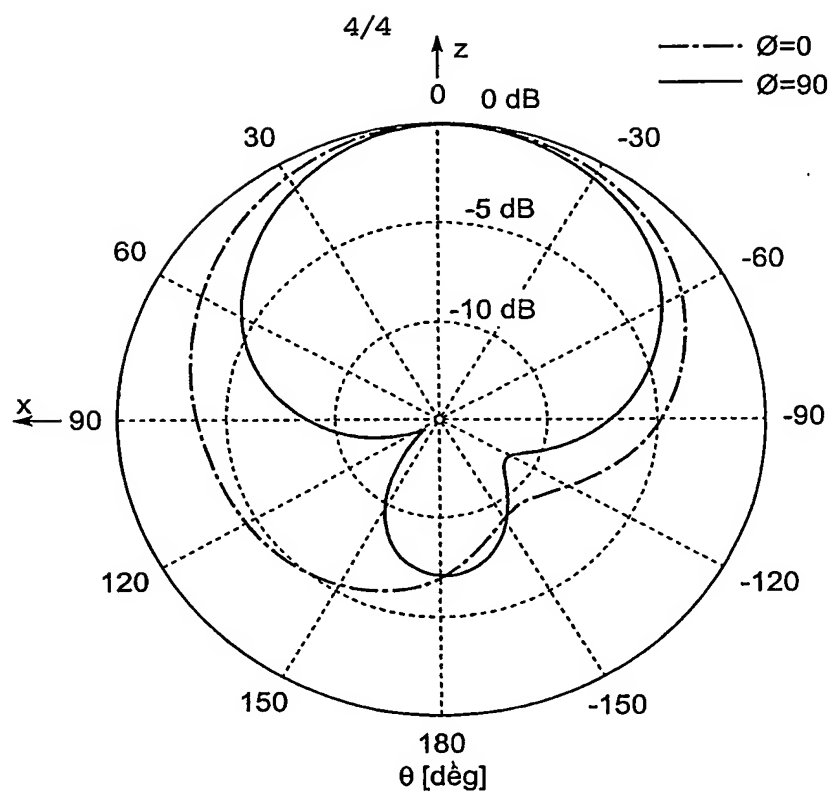


Fig. 6

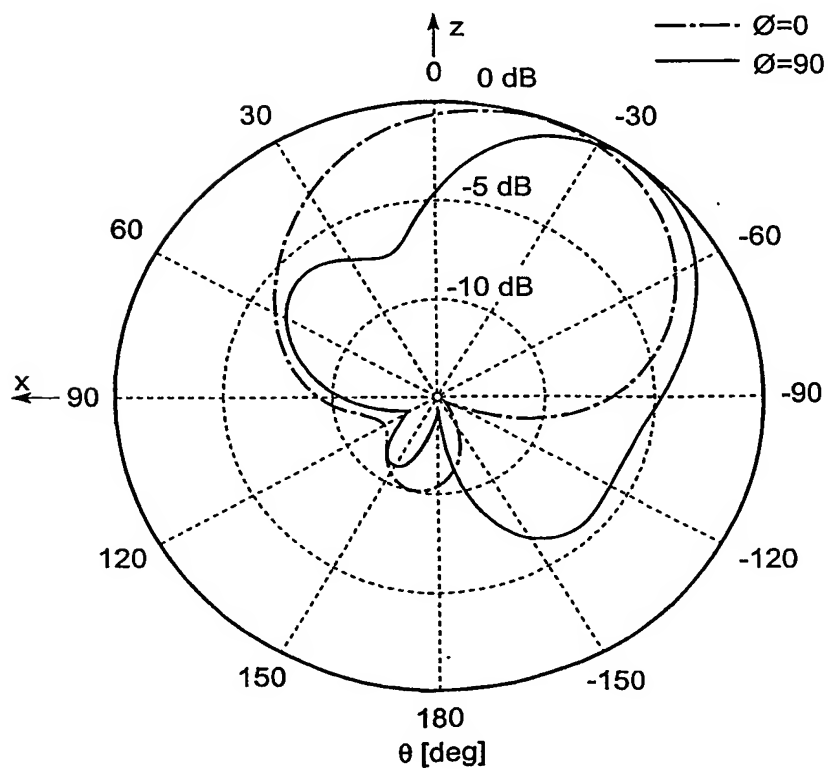


Fig. 7

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 03/08603

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H01Q1/24 H01Q5/00 H01Q9/04 H01Q21/28

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H01Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, INSPEC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	SONG C T P ET AL: "Triple band planar inverted F antennas for handheld devices" ELECTRONICS LETTERS, IEE STEVENAGE, GB, vol. 36, no. 2, 20 January 2000 (2000-01-20), pages 112-114, XP006014706 ISSN: 0013-5194	1,4-10
Y	the whole document	2,3,11, 12
Y	WO 02 058187 A (NORTEL NETWORKS LTD ;ADAMS DAVID (GB); AMOS SONYA (GB); KITCHENER) 25 July 2002 (2002-07-25) the whole document	2,3,11, 12
A	US 5 771 022 A (SCOTT NEIL ET AL) 23 June 1998 (1998-06-23) the whole document	1-12

☐

Further documents are listed in the continuation of box C.

☒

Patent family members are listed in annex.

* Special categories of cited documents:

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

& document member of the same patent family

Date of the actual completion of the international search

9 October 2003

Date of mailing of the international search report

20/10/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Moumen, A

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 03/08603

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 02058187	A	25-07-2002	US 6426723 B1	30-07-2002
			WO 02058187 A1	25-07-2002
US 5771022	A	23-06-1998	AU 7277394 A	28-02-1995
			JP 9501029 T	28-01-1997
			WO 9504386 A1	09-02-1995
			NZ 269257 A	19-12-1997